LF LIGHT **FENCES**

DATA SHEET




DURABLE BOUNDARY WALLS DESIGNED FOR EFFICIENT INSTALLATION.

Litecon Light Fences combine AAC panel technology with a lightweight, durable design for permanent perimeter applications. Panels are available in 2" and 3" thicknesses and can cover up to 16 ft² per panel, helping simplify handling and installation on site.

Mold & termite proof • Weather & fire resistant • Low maintenance

DIMENSIONS

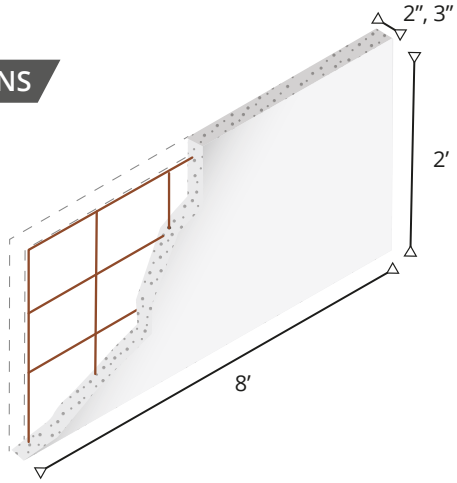

WORKFORCE PERFORMANCE

PRODUCT PLACEMENT	PERFORMANCE
2" FencePanel	150 ft/l per day
3" Fence Panel	125 ft/l per day

Work force: 2 installers.

MEASUREMENTS

THICKNESS (in)	HEIGHT (in)	LENGTH (in)	AREA (ft^2)	WEIGHT x PIECE (lb)	WEIGHT x FT^2 (lb)
1.97	24	96	16.00	81.92	5.12
2.95	24	96	16.00	122.72	7.67



LITECON™
AUTOCLAVED AERATED CONCRETE

(210) 616-6390
(210) 605-7052
(210) 668-4545

info@liteconusa.com
liteconusa.com